

A Study Of The Martensitic Transition In NiMnIn Heusler Alloy Under A Magnetic Refrigeration Cycle

Francisco Rodríguez-Méndez¹, Bruno Chinè¹, Simone Fabbri², Franca Albertini²

¹School of Materials Science and Engineering, Costa Rica Institute of Technology, Cartago, Costa Rica

²Institute of Materials for Electronics and Magnetism, National Research Council, Parma, Italy

Abstract

Solid-state magnetic refrigeration near room temperature, based on the magnetocaloric effect (MCE), is being investigated as an environmentally friendly and sustainable alternative to traditional vapor-compression systems (responsible for the 7.8% of greenhouse gas emissions) [1] [2], since it exhibits zero ozone depletion and global warming potential [3] [4]. Among the families of magnetocaloric materials, Ni-Mn-In Heusler alloys have gained significant attention due to their composition of earth-abundant elements and their ability to display a significant MCE driven by a first-order ferromagnetic-to-paramagnetic transition [5]. This change is also accompanied by a structural martensitic phase transformation, which strongly influences the thermal and magnetic response of the material during cyclic operation [6]. In this work, a two-dimensional time-dependent model of a magnetic refrigeration system with an active magnetic regenerator (AMR) is developed to capture the thermal and structural behavior of a NiMnIn Heusler alloy subjected to a magnetic refrigeration cycle. The physical model consists of an AMR, two heat exchangers for the hot and cold sides of the device, and a working fluid. The cyclic flow is described by the Navier-Stokes equations for an incompressible fluid, meanwhile the thermal energy conservation equation accounts for the heat transfer in the fluid, solid, and the solid-fluid interfaces. The diffusionless reversible martensite to austenite phase transition is modeled using the Metal Phase Transformation module under the Metal Processing physics interface [7]. Then, the coupling between these three physics is developed by using the COMSOL Multiphysics® Conjugate Heat Transfer option, that combines the Heat Transfer in Solids and Fluids [8] and the Laminar Flow [9] under the Non-Isothermal Flow Multiphysics interface, and the Phase Transformation Latent Heat, which add the latent heat produced by the material phase transformation. The magnetocaloric effect is introduced here by the inclusion of a source term in the energy relation that is dependent on the adiabatic temperature change and the specific heat of the magnetocaloric material. The latter two parameters are inserted into the model by using interpolated functions based on experimental behavior data for the Heusler compound. The computational framework presented allows the study of the propagation of the transformation fronts, the development of the thermal gradient of the magnetocaloric material over time, and the energy redistribution associated with the structural transitions, especially during rapid cycling. This model encourages future studies in which Heusler-based regenerators can be evaluated and optimized by varying operating conditions, field protocols, and material configurations where structural and thermal couplings are decisive, also providing a predictive simulation tool for solid-state cooling technologies based on phase transformation behavior.

Reference

- [1] D. Coulomb, J. L. Dupont and A. Pichard, "The Role of Refrigeration in the Global Economy," 29th Informatory Note on Refrigeration Technologies, Technical Report, International Institute of Refrigeration, Paris, France, 2015.
- [2] International Energy Agency, "The Future of Cooling," 2018. [Online]. Available: <http://www.iea.org/reports/the-future-of-cooling>. [Accessed July 2023].
- [3] D. Coulomb, J.-L. Dupont and V. Morlet, "The Impact of the Refrigeration Sector on Climate Change," 35th Informatory Note on Refrigeration Technologies, Technical Report, International Institute of Refrigeration, Paris, France, 2016.
- [4] H. Ucar, D. Paudyal and O. Boyraz, "Using numerical methods to screen magnetocaloric materials in an active magnetic regenerative cycle," International Journal of Refrigeration, vol. 120, pp. 50-57, 2020.
- [5] T. Gottschall, "On the magnetocaloric properties of Heusler compounds: Reversible, time- and size-dependent effects of the martensitic phase transition," TUprints - TU Darmstadt publication service, Darmstadt, 2016.
- [6] T. Gottschall, A. Gràcia-Condal, M. Fries, A. Taubel, L. Pfeuffer, L. Mañosa, A. Planes, K. P. Skokov and O. Gutfleisch, "A multicaloric cooling cycle that exploits thermal hysteresis," Nat Mater, vol. 17, no. 10, pp. 929-934, 2018.
- [7] Comsol AB, Comsol Multiphysics-Metal Processing Module, User's Guide, Version 6.2, 2023
- [8] Comsol AB, Comsol Multiphysics-Heat Transfer Module, User's Guide, Version 6.2, 2023.
- [9] Comsol AB, Comsol Multiphysics-CFD Module, User's Guide, Version 6.2, 2023.

Figures used in the abstract

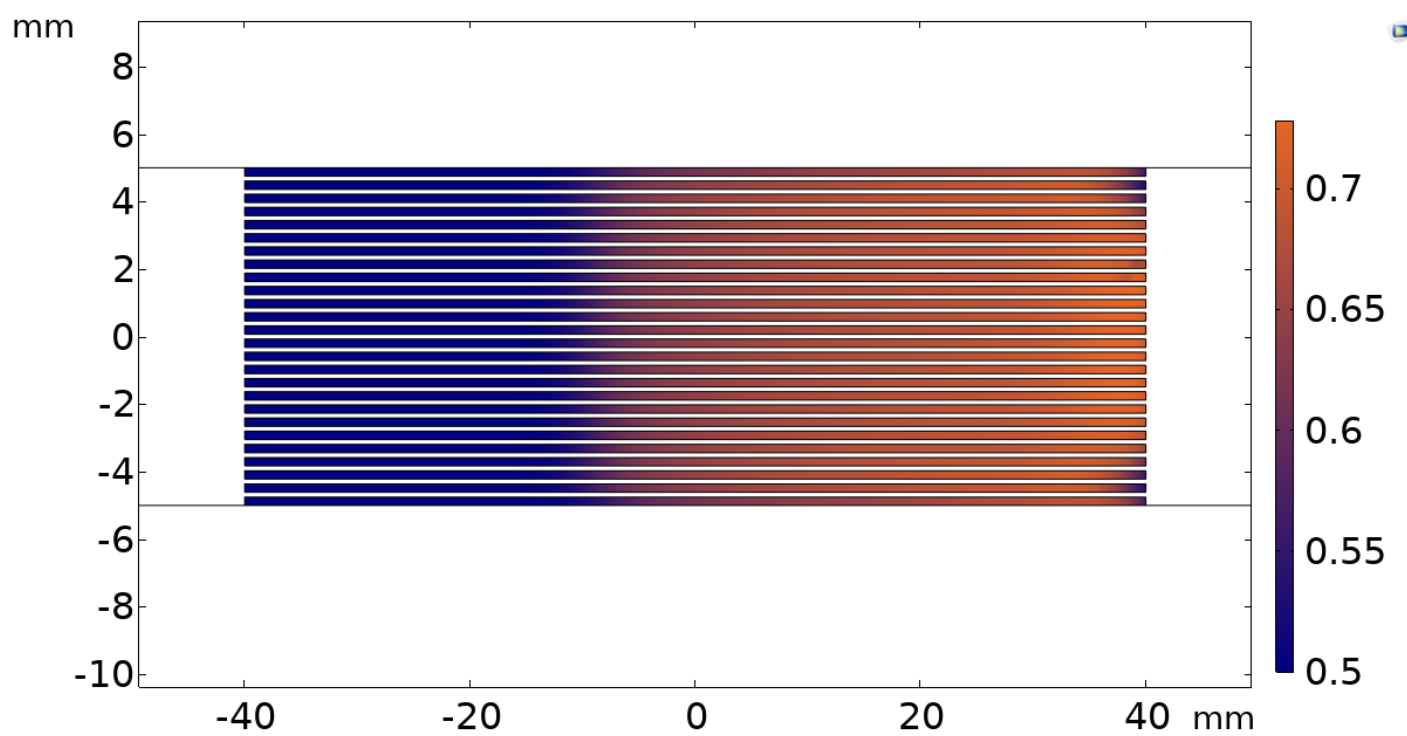


Figure 1 : Martensite phase fraction over the NiMnIn magnetocaloric regenerator at 1200s.